

- A - Width Top
- B - Width Middle
- C - Width Bottom
- D - Height Left
- E - Height Right
- F - Diag UL/LR
- G - Diag UR/LL
- H - Sill to Split pt (Split windows)

Acrylic Window Innovations

Po Box 6305
Saint John, NB, Canada
E2L 4R7
506.635.4991
506.672.7062 fax
sales@innergwindows.com

Date:

Customer:

PO #:

Telephone:

Contact Name:

Fax:

Window #	Location	Color		Sill Type		Mounting		Attachment		Rough opening Measurements							
		(B)rown (W)hite	(M)agnetic (P)ad	(I)n-jamb (F)lush	(A)ngle (T) Steel tape	A	B	C	D	E	F	G	Split? Y/N	H			
1																	
2																	
3																	
4																	
5																	
6																	
7																	
8																	
9																	
10																	

Notes: Attach a separate note for any windows which require special treatment. ie..Arch tops, special colors, etc

InnerG window measurement instructions

Location - This field is used to identify where the window is located. Place the physical location of the window in this field – i.e. Bedroom, Dining Room, etc.


Color - The InnerG window moldings come in chocolate brown and white. Choose your color from the list.

Sill Type - The windows come with two different types of sills, depending on the application. There is no price difference between either choice. Magnetic sills have magnetic moldings on the bottom, identical to the moldings on the other 3 sides of the window. Use this choice for when the windows will be removed infrequently or never removed.

Pad sills come with a plastic handle and a padded foam underside that seals to the window sill. Choose padded sills if the window is likely to be removed regularly.




Padded Sills

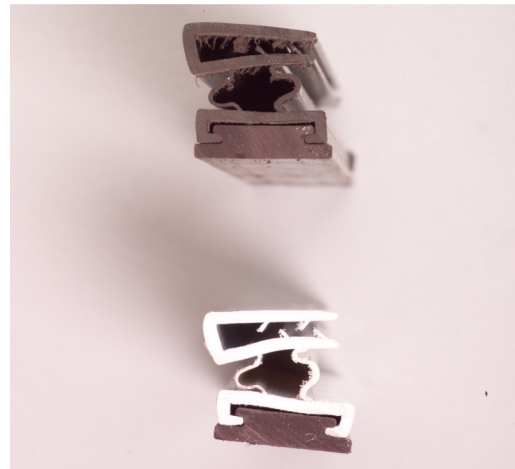

Magnetic Sills

Mounting – Describes how the window will be mounted. In-Jamb mounting is mounted between the vertical Jamb of the window, inside the casing of the existing window. Flush mounted windows fit around the window trim perimeter, “capping” the existing window. Flush mounting is used when there is insufficient depth to mount the window inside the existing window casing (i.e. < 1 1/4”)

Attachment – Specify either L-Angle, or steel tape. L-angles are 7/8" x 3/4" in size and should be used for most In-Jamb mountings. Use steel tape when flush mounting windows, since there is no room to attach L-angles to the window casing.

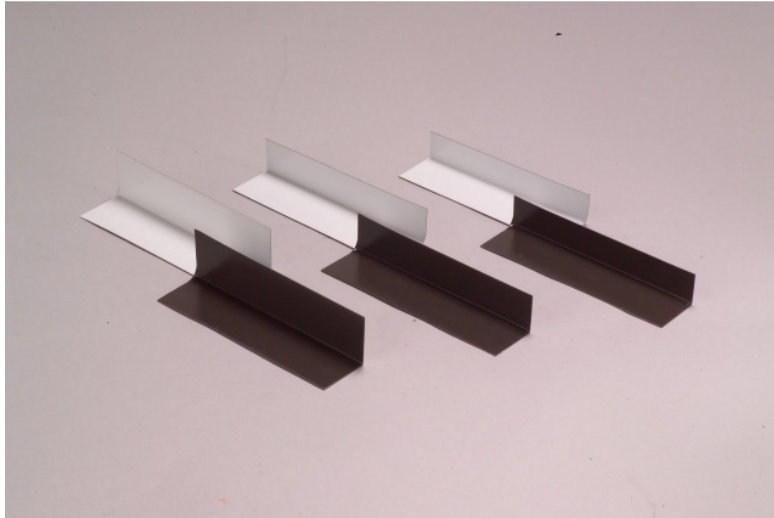

L - Angles

Opening measurements – Measure the opening of the window casing. If windows are consistent and square, you need to only specify height and width. Out of square windows need to be measured more carefully and diagonal measurements should be checked for all windows. Diagonal differences of greater than 5/8" indicate an out-of-square window, and you will need to report all dimensions on the form. Our measurement sticks are a useful tool to accurately get all of your measurements, particularly the hard to measure diagonals.



Measuring Sticks

Split – indicate whether this is to be a split window. If you wish a 2 piece window, report it here as split, and provide the measurement from the window sill to the split point.